

# Instruction Sheet For The Quik-Set Mailbox Post

Part #43016

**CAUTION! BEFORE INSTALLING CHECK FOR UNDERGROUND HAZARDS (GAS, ELECTRICAL OR TELEPHONE LINES).**

## STEP #1

Connect top post to bottom section with bolts (2-2") provided. (See A) Tighten securely to prevent post from wobbling.

## STEP #2

Locate installation area. Level, if necessary, an area 9" square for stabilizer plate. Remove all loose soil and grass for best installation.

## STEP #3

Place tip of auger in center of desired area. Insert 18" rod, provided, in hole in top of post. With both hands on either side of 18 inch rod press down firmly as you turn in a clockwise direction. Turn only 1/4 turns as you walk around post making sure post is held in a plumb position at all times.

## STEP #4

As the bottom of the post is pulled near ground level, clear away loose soil. Place stabilizer plate onto rod and press down firmly to embed the down turned corners into the ground (See B). Now continue to turn the post until the metal plate at bottom tightens securely against the stabilizer plate (See C). Continue to turn slowly until the scroll face front of mailbox.


**CAUTION: Should the base hit an underground object (ie. rock, stump) and will not turn-STOP. Continued turning may damage the anchor base. Simply remove the anchor base (unscrew) and move to a new location and reinstall.**

## STEP #5

Adjust bracket halves to fit width of mailbox aligning holes in brackets (See D).


**IMPORTANT: BE SURE BOTH BRACKET HALVES ARE OVERLAPPED THE SAME WAY TO INSURE PROPER ALIGNMENT WITH MAILBOX HOLES.**

Next mount bracket halves to post with bolts provided (2-1/2") (Note: Bolts pass through brackets and beside post) and tighten securely, do not over tighten!

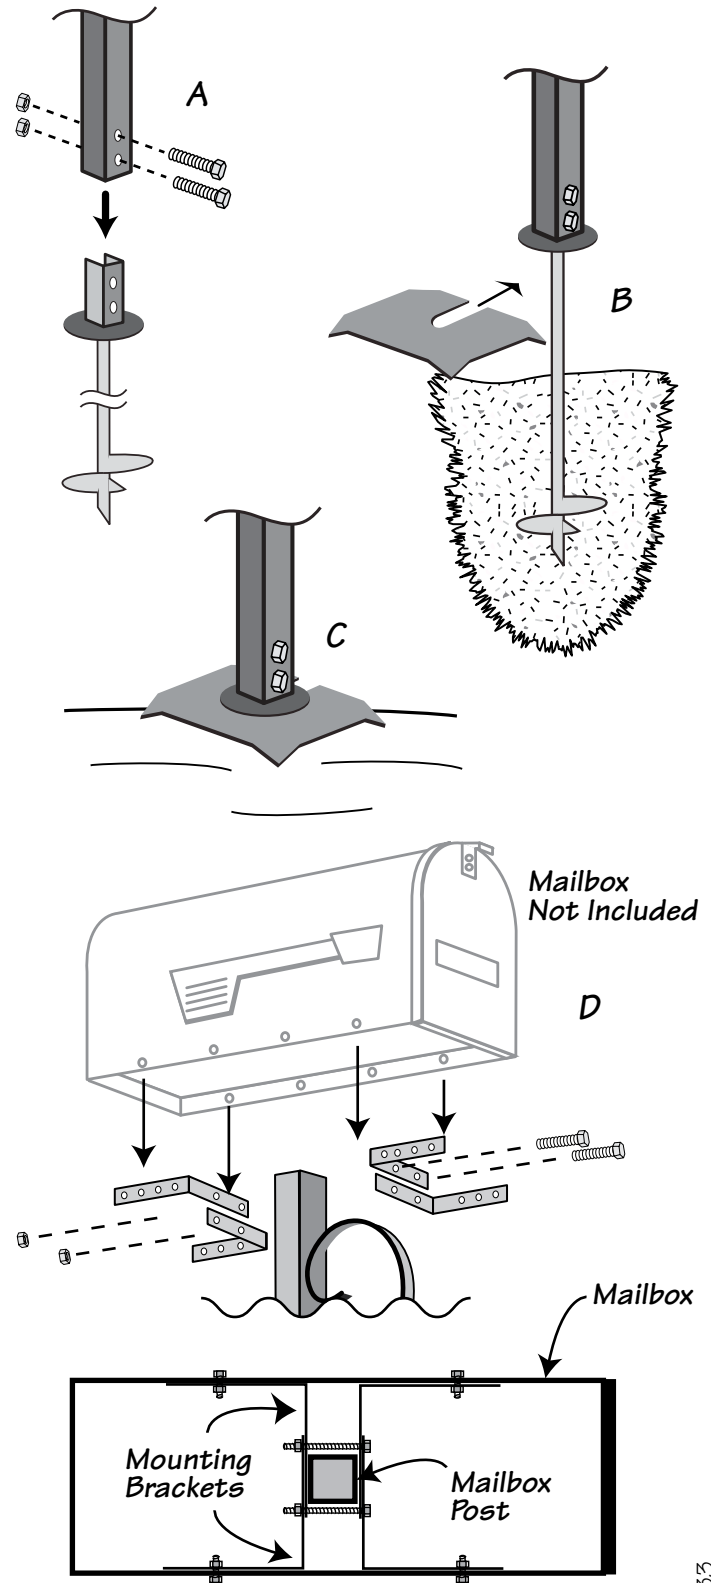

Instruction Sheet #08863

**TIE DOWN ENGINEERING 5901 Wheaton Drive Atlanta GA, 30336**  
**www.tiedown.com (404) 344-0000 Fax (404) 349-0401**



012910,F653

## LIMITED TWO YEAR WARRANTY

**TIE DOWN ENGINEERING, Inc.** warrants for a period of twenty four (24) months from the date of purchase that each new Quik-Set Mailbox Post shall be free from any defect in material and workmanship subject to the following conditions, exclusion, obligations, and limitations.

**1. COVERAGE.** Any material or workmanship found to be defective by Tie Down within twenty four (24) months warranty term shall be remedied without charge at any authorized Quik-Set dealer located within the USA. This warranty is limited solely to remedying of defects in materials or workmanship and does not cover inconvenience or loss of use.

**2. OWNERS OBLIGATION-** To install the Quik-Set Mailbox Post as instructed and maintain periodically at owner's expense. Any warranty claims must be accompanied by proof of purchase including date and location.

**3. LIMITATIONS** - This warranty shall not apply to or included any of the following:

- (a) Damage sustained by any moving vehicle.
- (b) Misuse or neglect on owners part.
- (c) Deterioration or paint finish
- (d) Damage sustained due to vandalism, theft or any act of God.

**4. LEGAL RIGHTS** - This warranty gives you specific rights, you may also have other rights which vary from state to state.