

# **Racking/Alignment Brackets**

## **Installation Instructions**

### **Part #59366**



Set home according to manufacturers set-up instructions.

Once the point of roof alignment has been reached, place one Racking Bracket on each half approximately 3 feet apart making sure the loops are facing each other.

Attach the Racking Brackets along the top ridge of the two halves to be aligned using a minimum of 6 (3/8" X 5") lag bolts per Racking Bracket. Drill small pilot holes before installing the lag bolts.

Attach come-a-long to the eyelets of the opposing Racking Bracket and align the two halves by tightening the come-a-long.

Finish by putting roof straps in place before removing Racking Brackets.

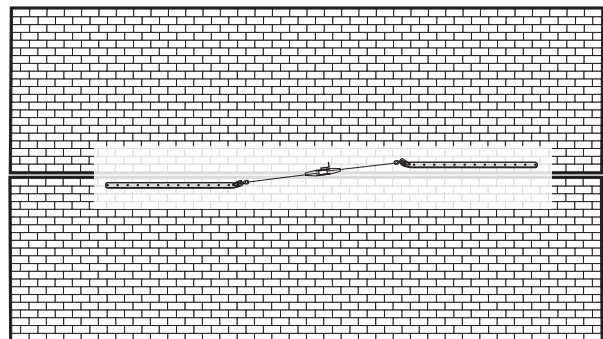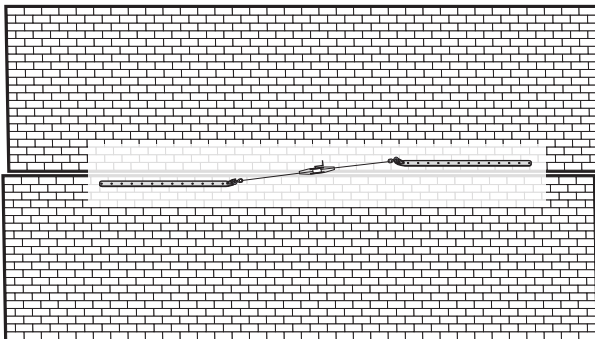

Place the Racking Brackets approximately 3 feet apart making sure the loops are facing each other.

Attach come-a-long to the eyelets of the opposing Racking Brackets. Slowly tighten until the two halves come into alignment.