



MODEL BCS Crimping Seal Part #59175

Model BCS - Crimping Seal

Semi – Closed Style, Heavy Duty Crimping Seal
.030 Thick Pre-Galvanized, ASTM D-3953-97
Specifications Grade 2, Finish B, G-60 or Better


For use with standard 1-1/4" steel strapping that has been tested and conforms to part 3280 of the HUD Code and part 3285 of the installation standards

Strap Splice

For lengthening or splicing of two straps in the field, a double crimp seal splice is required. Overlap strap approximately 12 inches and use two crimp seals evenly spaced, with 2 crimps per seal.

Strap Attachment

One crimp seal is used when strap is attached to a sidewall bracket or a strap protector. If the bracket does not have a radius edge, a radius clip (short "U" shaped piece of strap) must be placed between the strap and the contact point to protect the strap from sharp edges. Verify state requirements for number of crimp seals required.

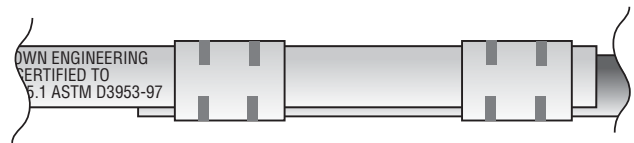

2 Seals - 2 Crimps Per Seal

