

Tie Down/ArborTie® Anchor Kit

#59451 Small Tree Anchor Kit
(3-15" anchors and 30' of ArborTie)

#59452 Medium Tree Anchor Kit
(3-30" anchors and 30' of ArborTie)

ArborTie® is a revolutionary material for staking and guying trees. Specifically designed to replace traditional methods such as wire and hose, ArborTie® is safe, soft, easy to use and less expensive than traditional tree ties.

The soft polypropylene materials have an exclusive weave that ensures a rounded edge at all times. This prevents the material from ever cutting into the bark of the tree, which is a common cause of injury or death to young trees. The weave also prevents unraveling like rope or string. Girdling is eliminated and the olive green color blends well with the surroundings.


The 900 lb. test strength stands up to fierce winds while providing enough sway to help the tree develop trunk strength. Fasten to any stake or anchoring system with traditional knots or nails. Eliminates the need to flag or cover guywires and the ArborKnot™ expands as the tree grows in caliper, preventing girdling, and providing the best method of staking and guying commercially available.

ArborKnot™ Instructions

The ArborKnot™ is a unique knot for guying which expands to allow for girdle free growth.

Step 1


Tie a simple knot 18" to 24" (depending on the diameter of the tree) from either end of the ArborTie®.



This end wrapped around tree after knot is tightened


Step 3

Follow motion of ArborTie® above, finishing the knot by pulling tightly on points A and B at the same time.

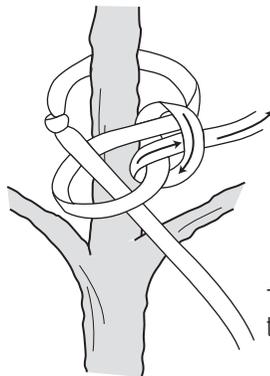


Step 5

The ArborKnot provides secure, girdle free attachment of ArborTie® to tree.




Step 2

Wrap this end around tree. Begin the above knot below the knot that was tied in Step 1.



Step 4


Slide knot just completed up to the knot tied in Step 1. Fasten free end to stake of anchor.



Instruction #08133 (F1147 - Rev. 3/20/19)

TIE DOWN
MANUFACTURING INGENUITY

404-344-0000 • tiedown.com
605 Stonehill Drive SW, Atlanta, GA 30336

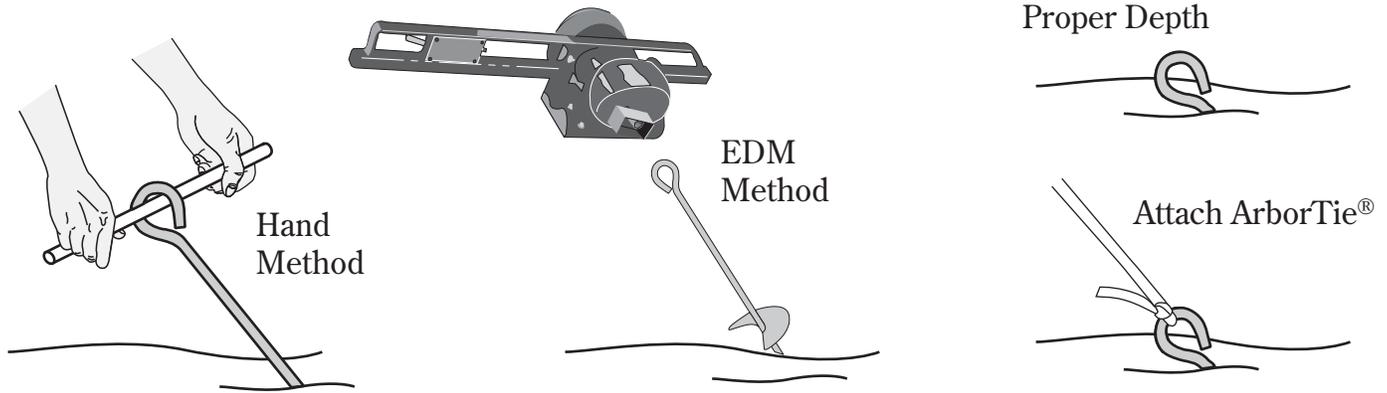

Install ground anchors:

Hand Method:

- a. Install anchors using a straight rod to turn (screw) anchor into the ground at the same angle as the ArborTie®.
- b. A starter hole, up to 1/3 of the anchor length can be used to start anchor into the ground.
- c. Anchor eye should be just above soil level.

Electric Drive Machine Method:

- a. Attach adapter head to shaft of the EDM motor, tighten set screw.
- b. Place extension handle in the end of the EDM if needed.
- c. Place anchor head into adapter, line up anchor shaft with EDM shaft.
- d. Flip forward/reverse switch to forward.
- e. Hold on/off switch to install.
- f. Anchor eye should be just above soil level.

Typical ArborTie®
guying installation

