


3' x 20' Finger Dock

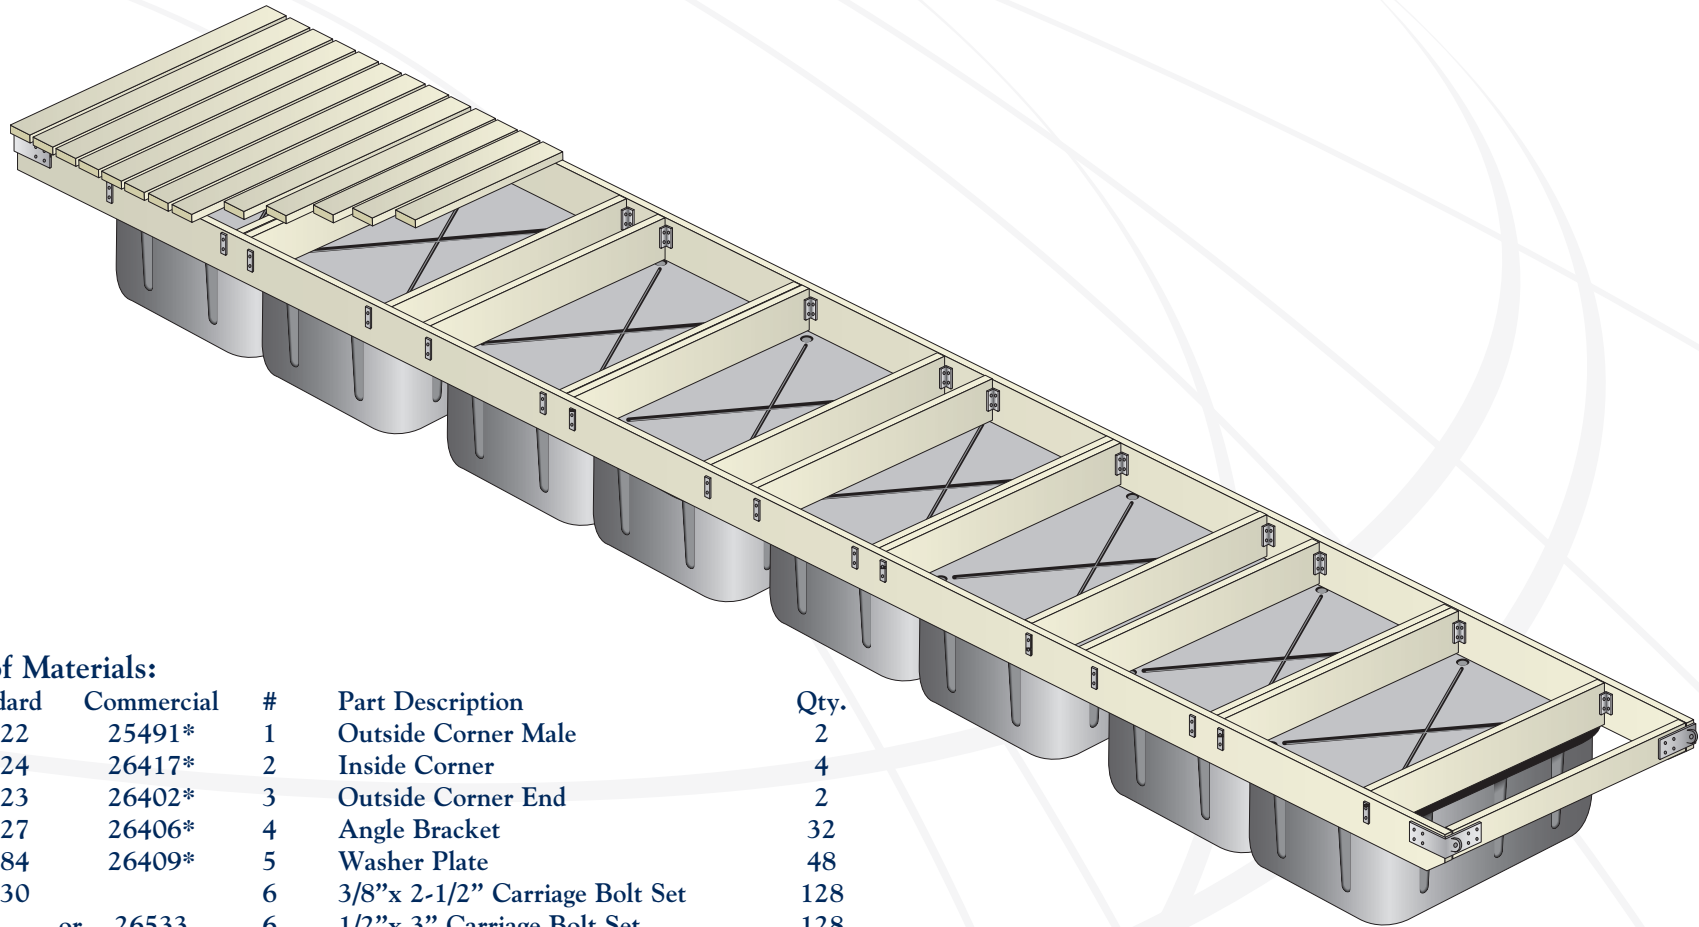

Bill of Materials:

Standard	Commercial	#	Part Description	Qty.
26522	25491*	1	Outside Corner Male	2
26524	26417*	2	Inside Corner	4
26523	26402*	3	Outside Corner End	2
26527	26406*	4	Angle Bracket	32
24284	26409*	5	Washer Plate	48
26530		6	3/8"x 2-1/2" Carriage Bolt Set	128
	or 26533	6	1/2"x 3" Carriage Bolt Set	128
	26536	7	1/2"x 5" Carriage Bolt Set	16
24288	24290	8	3/8" x 2" Lag Bolt & Flat Washer	64
•	•	9	20 Penny Screw Nails	About 9 lbs.
•	•	10	24" x 36" x 16" Float Drum	8

• Obtained from Local Hardware Store Or Marine Supply

* Most commonly used.

Lumber Materials:

2" x 10" x 20'	Side Stringers (237.5")	2
2" x 10" x 3'	End & Cross Stringers (33")	18
2" x 6" x 4'	Deck Boards (38.5")	40

Design Notes:

Tie Down assumes no responsibility or liability for the completeness or accuracy of these drawings. Drawings are provided as a guideline only. Dimensions are approximate. Variances do concur in lumber and component parts, so please check all measurements on dock hardware, float drums and lumber prior to drilling holes. Verify all dimensions length, width and thickness of lumber.

3' x 20' Finger Dock

